



ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

DEEN609T-W / DEEN2016T-W / DEEN3018T-W / DEEN6029T-W


Cabinet speaker 6 W / 20 W / 30 W / 60 W 100 V

1 year warranty

- AGELESS FORM STABLE
- EASY MOUNTING THROUGH OMNI MOUNT BRACKET
- 50 HZ STABLE 100 V TRANSFORMER
- TOUCH PROTECTED 100 V QUICK CONNECTING CLAMP
- SELECTED LOUDSPEAKER QUALITY
- QUICK IMPEDANCE CHANGE THROUGH REAR PANEL ROTARY SWITCH
- STANDARD COLOURS BLACK AND WHITE
- CUSTOM COLOURS AVAILABLE (QTY RELATED FOR DEEN2016T/ DEEN3018T/DEEN6029T)
- EXTRA SPECIFICATIONS FOR DEEN6029T
- LOW INFLAMMABILITY HIGH IMPACT POLYSTYRENE MATERIAL
- STABLE & POWDER COATED FRONT GRILL

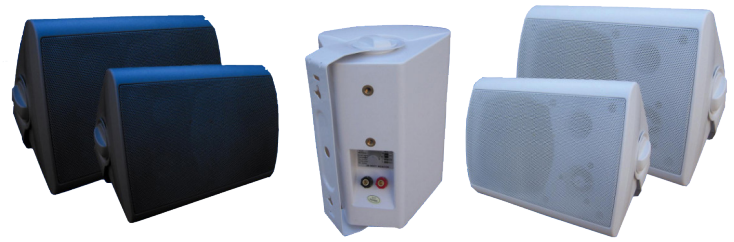

- EXTRA SPEC FOR MINI DEEN609T-W
- 2 WAY MONITOR IN MINI FORMAT
- EASY & QUICK MOUNTING THROUGH INCL. WALL BRACKET
- OPTIONAL MOUNTING CIA REAR SCREW SLOT
- LOW INFLAMMABILITY HIGH IMPACT POLYSTYRENE CASING
- POWDER COATED FRONT GRILL
- SELECTED TWO WAY COMPONENTS
- 8 OHM CONNECTION AVAILABLE
- STANDARD COLOURS BLACK & WHITE

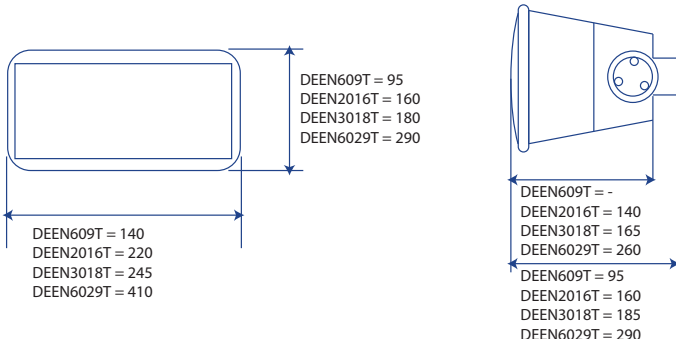

Specifications	DEEN609T-W / -B	DEEN2016T-W / -B	DEEN3018T-W / -B	DEEN6029T-W / -B
Rated power	6 W 2 way	20 W 2 way	30 W 2 way	60 W 2 way bass reflex
Power available	6 / 3 / 1.5 W 100 V	20 / 10 / 5 / 2.5 W 100 V	30 / 15 / 7.5 / 3.75 W 100 V	60 / 30 / 15 / 7.5 W 100 V & 8 Ohm
Frequency range	120 - 20000 Hz	80 - 20000 Hz	60 - 20000 Hz	40 - 20000 Hz
SPL 1W/1m	91 dB	90 dB	92 dB	89 dB
SPL n W/1m	99 dB	103 dB	106.5 dB	107 dB
Radiation	-	-	-	-
Material	Polystyrene HIPS	ABS	ABS	Polystyrene HIPS
Environnement	Inside	Inside	Inside	Inside
Dimensions mm	140 x 95 x 100	220 x 160 x 140 (160)	245 x 180 x 165 (185)	410 x 290 x 260 (290)
Weight kg	0.8	1.9	2.6	6.6
Colour	Black or white	Black or white	Black or white	Black or white

Photos & informations for commercial use only - we reserve the right to change without prior notice



ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

DEEN617T-W & DEEN1017T-W

6 W 100V antivandalism speaker

1 year warranty

- SUITABLE FOR VANDALISM OPTIMIZED WITH REAR PANEL
- 2 X PRE-EMBOSSING FOR PG CONNECTORS
- OPTIONAL STICK-PROTECTION & TORX-SCREWS
- TOUCH PROTECTED 100V QUICK CERAMIC CONNECTING CLAMP
- SPEECH OPTIMIZED LOUDSPEAKER QUALITY

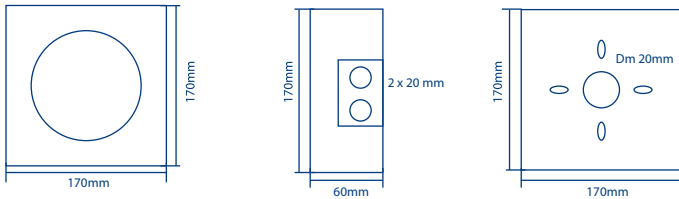

- VOLUME CONTROL & 24 V RELAY AVAILABLE
- CUSTOM SIZE & STAINLESS STEEL VERSIONS OBTAINABLE
- WEATHER PROOFED & WEATHER PROTECTED VERSION AVAILABLE

Specification	DEEN617T-W	DEEN1017T-W
Rated power	6 W	10 W
Power available	100 V - 6 / 3 W	100V - 10 / 5 / 2.5W
Frequency response	100 - 15000 Hz	70-17000 Hz
SPL 1W/1m	92 dB	93 dB
SPL max W/1m	100 dB	103 dB
Coverage	180° (1,4 kHz)	180° (1.2 kHz)
Material	Metal	Metal
Environment	inside	inside
Dimensions mm	170 x 170 x 63	170 x 170 x 63
Cut out mm	-	-
Weight kg	1,5	1.9
Colour	White	White



ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

DEEN618T & 1018T-W & DEEN622T & 1022T-W


6 & 10W 100V full metal design wall or ceiling speaker

1 year warranty

- FIRE RESISTANT & BALL ATTACK PROTECTED
- AGELESS FORM STABLE
- THEFT PROTECTED MOUNTING BRACKET
- 50 Hz STABLE 100 V
- TRANSFORMER TOUCH PROTECTED 100 V
- QUICK CONNECTING CLAMP

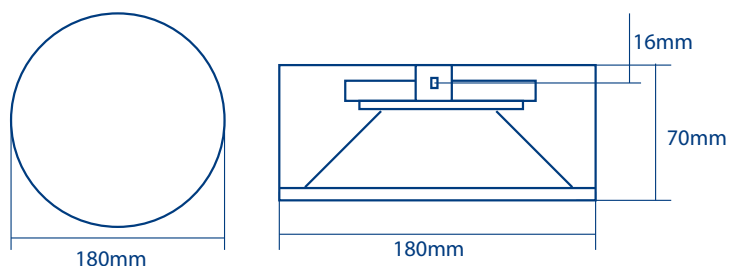

- POWER SAVING THROUGH HIGH SOUND PRESSURE LEVEL
- CUSTOM SIZE & CUSTOM COLOUR AVAILABLE BALLPROOF VERSION AVAILABLE
- 2 WAY VERSIONS AVAILABLE

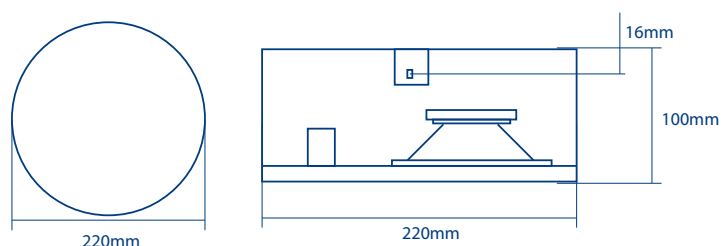

Specifications	DEEN618T-W	DEEN1018T-W	DEEN622T-W	DEEN1022T-W
Nominal output	10 / 15 W	10 W	10 / 15 W	10 / 15 W
W available	100 V - 6 / 3 / 1.5 W	100 V - 10 / 5 / 2.5 W	100 V - 1.5/3/6 W	100 V - 10 / 5 / 2.5 W
Bandwidth	100 - 16000 Hz	70 - 17000 Hz	70 - 18000 Hz	70 - 18000 Hz
SPL 1W/1m	103 dB (1.5 kHz)	95 dB (3.5 kHz)	106 dB (3.2 kHz)	106 dB (1.8 kHz)
SPL 6W/1m	111 dB (1.5 kHz)	105 dB (3.5 kHz)	114 dB (3.2 kHz)	116 dB (1.8 kHz)
Radiation	180° (1 kHz)	180° (1.2 kHz)	180° (1.5 kHz)	180° (1.5 kHz)
Material	ABS	ABS	ABS	ABS
Environment	Inside	Inside	Inside	Inside
Dimensions mm	180 x 70	180 x 70	220 x 100	220 x 100
Weigth kg	1	1.4	1.4	1.5
Colour	RAL9010	RAL9010	RAL9010	RAL9010



ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

DEEN619T-W

Enceinte murale ou de plafond, 6 W 100 V blanc

1 year warranty

- OVAL FORMED LOUDSPEAKER CABINET
- SHOCK RESISTANT UL 94 ABS CABINET OF VERY LOW FLAMMABILITY

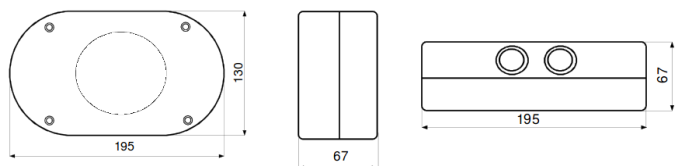

Specifications	DEEN619T-W
Nominal output	6 W
W available	100 V - 6 / 3 / 1.5 W
Bandwidth	110 - 15000 Hz
SPL 1W/1m	92 dB
SPL max W/1m	100 dB
Material	ABS
Environment	Inside and damp room
Dimensions mm	195 x 130 x 67
Weight kg	0.7
Colour	White

- STEAM PROOF & SPLASH PROOF
- WET ROOM/DAMP ROOM SUITABLE
- OPTIMIZED FOR SAUNAS, BATHS, STEAM BATHS, SHIPS & LARGE KITCHENS FOR ALL AREAS WITH HIGH HUMIDITY & HIGH STEAM CONTENT
- THREE PG EMBOSSINGS (2 x LATERAL / 1 x BACK WALL)
- TOUCH PROTECTED 100 V QUICK CONNECTING CLAMP
- SPECIAL TREATED LOUDSPEAKER
- V2A SCREWS



ARCHEAN TECHNOLOGIES




1899 avenue d'Italie - 82000 MONTAUBAN FRANCE
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

DEEN621T-W & DEEN1024T-W

6 W & 10W wall or ceiling speaker

1 year warranty

- ARCHITECTURAL ATTRACTIVE SPEAKER FORM
- BALANCED SPEECH/MUSIC PERFORMANCE
- HIGH SPEECH INTELLIGIBILITY
- REAR PANEL INCLUDED
- HIGHLY STABLE ABS CABINET OF VERY LOW FLAMMABILITY

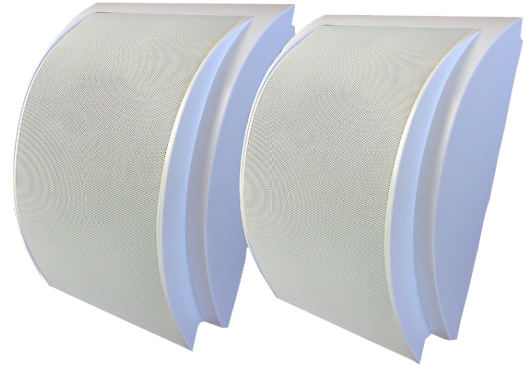

- TOUCH PROTECTED 100 V CONNECTING TERMINAL
- 2 WAY VERSIONS AVAILABLE (DEEN1024T-W)
- VOLUME CONTROL & 24 V RELAY OBTAINABLE

Specifications	DEEN621T-W	DEEN1024T-W
Nominal output	6 W	10 W
W available	100 V - 6 / 3 W	100 V - 10 / 5 W
Bandwidth	80 - 15000 Hz	70 - 18000 Hz
SPL 1W/1m	92 dB	93 dB
SPL max W/1m	100 dB	103 dB
Radiation	-	-
Material	ABS	ABS
Environment	Inside	Inside
Dimensions mm	310 x 210 x 89	310 x 240 x 100
Weight kg	1.4	1.6
Colour	White	White



ARCHEAN TECHNOLOGIES




1899 avenue d'Italie - 82000 MONTAUBAN FRANCE
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

DEEN623T-W & DEEN1023T-W

6W & 10W 100V wall or ceiling speaker

1 year warranty

- VERY FAST MOUNTING THROUGH QUICK SNAP FRONT GRILL
- ONLY 2 DRILLING POINTS FOR THE WHOLE LOUDSPEAKER
- HIGHLY STABLE ABS CABINET OF VERY LOW FLAMMABILITY
- 50 Hz STABLE 100 V TRANSFORMER
- TOUCH PROTECTED 100V CONNECTING CLAMP

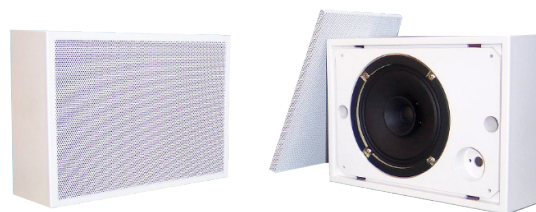

- OPTIONAL REAR PANEL AVAILABLE
- POWER SAVING THROUGH HIGH SOUND PRESSURE LEVEL
- 2 WAY VERSIONS & CUSTOM COLOURS AVAILABLE
- VOLUME CONTROL & 24 V RELAY OBTAINABLE
- WEATHER PROOFED & WEATHER PROTECTED VERSION ON DEMAND

Specifications	DEEN623T-W	DEEN1023T-W
Nominal output	6 W	10/15 W
W available	100 V - 6 / 3 / 1.5 W	100 V - 10 / 5 / 2.5 W
Bandwidth	85 - 15000 Hz	70 - 18000 Hz
SPL 1W/1m	93 dB (97 dB 1 kHz)	93 dB
SPL 6W/1m	101 dB (105 dB 1 kHz)	103 dB
Radiation	180° (1 kHz)	180° (1.2 kHz)
Material	ABS	ABS
Environment	Inside	Inside
Dimensions mm	230 x 170 x 80	230 x 170 x 80
Weight kg	1.2	1.4
Colour	White	White



ARCHEAN TECHNOLOGIES




1899 avenue d'Italie - 82000 MONTAUBAN FRANCE
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

DEEND623T/1023T-W & DEEND21023T-W

6W 10W and dual cone 10W 100V white cabinet speaker

1 year warranty

- NEW SOFTLY BENDED
- DESIGN CABINET
- ONLY 2 DRILLING POINTS FOR THE WHOLE LOUDSPEAKER
- HIGHLY STABLE ABS CABINET OF VERY LOW FLAMMABILITY
- 50 Hz STABLE 100V TRANSFORMER TOUCH
- PROTECTED 100V CONNECT ING CLAMP

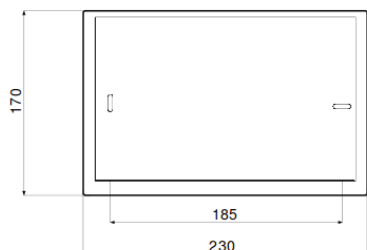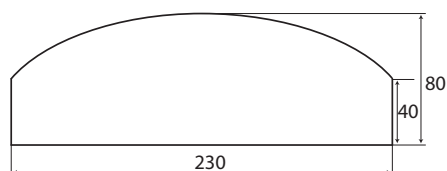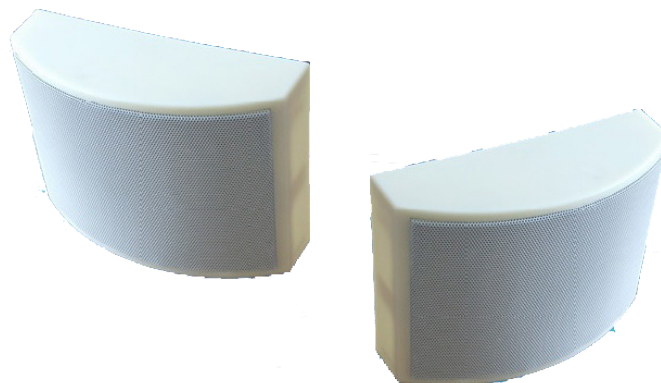

- OPTIONAL REAR PANEL AVAILABLE
- POWER SAVING THROUGH HIGH SOUND PPRESSION LEVEL
- 2 WAY VERSIONS & CUSTOM COLOURS AVAILABLE
- VOLUME CONTROL & 24V RELAY OBTAINABLE
- WEATHERPROOFED & WEATHER PROTECTED VERSION OBTAINABLE

Spécifications	DEEND623T-W	DEEND1023T-W	DEEND21023T-W
Puissance nominale	6 W	10/15 W	15 W dual cone
Choix des puissances	100 V - 6 / 3 / 1.5 W	100 V - 10 / 5 / 2.5 W	100 V - 10 / 6 / 3 W
Bande passante	85 - 15000 Hz	70 - 18000 Hz	70 - 20000 Hz
SPL 1W/1m	93 dB (97 dB 1 kHz)	93 dB	93 dB
SPL 6W/1m	101 dB (105 dB 1 kHz)	103 dB	103 dB
Couverture	180° (1 kHz)	180° (1.2 kHz)	180° (1.2 kHz)
Matière	ABS	ABS	ABS
Environnement	Intérieur	Intérieur	Intérieur
Dimensions en mm	230 x 170 x 80	230 x 170 x 80	230 x 170 x 80
Encastrement en mm	-	-	-
Poids en kg	1.2	1.4	1.6
Couleur	Blanc	Blanc	Blanc



ARCHEAN TECHNOLOGIES



1899 avenue d'Italie - 82000 MONTAUBAN FRANCE
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

DEEN625/1025T-W

6 or 10W 100V white speaker

1 year warranty

- VERY FAST MOUNTING THROUGH QUICK SNAP REAR PANEL
- ONLY 2 DRILLING POINTS FOR THE WHOLE LOUDSPEAKER
- HIGHLY STABLE MDF CABINET OF VERY LOW FLAMMABILITY
- 50 Hz STABLE 100 V TRANSFORMER
- TOUCH PROTECTED 100V CONNECTING CLAMP

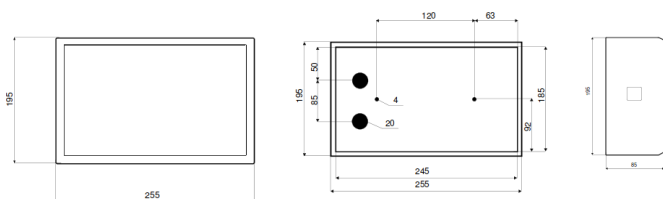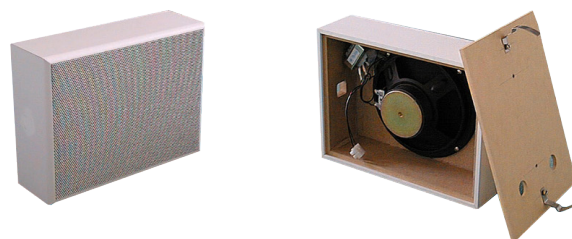

- BALL ATTACK RESISTANT FRONT GRILL
- POWER SAVING THROUGH HIGH SOUND PRESSURE LEVEL
- VOLUME CONTROL & 24V RELAY ASSEMBLING AVAILABLE IN OPTION

Specifications	DEEN625T-W	DEEN1025T-W
Nominal output	15 W	15 W
W available	100 V - 6 / 3 / 1.5 W	100 V - 10 / 5 / 2.5 W
Bandwidth	80 - 17000 Hz	80 - 17000 Hz
SPL 1W/1m	98.5 dB (1.8 kHz)	98.5 dB (1.8 kHz)
SPL 6W/1m	106.5 dB (1.8 kHz)	108.5 dB (1.8 kHz)
Radiation	160° (1 kHz)	160° (1 kHz)
Material	MDF	MDF
Environment	Inside	Inside
Dimensions m	255 x 195 x 85	255 x 195 x 85
Weight kg	1.8	1.9
Colour	White	White



ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

DEEN627T-W & DEEN1027T-W

6 W & 10W 100 V white wall speaker

1 year warranty

- SUITABLE FOR HOLLOW SPACE & IN WALL MOUNTING
- HOLLOW SPACE CABINET IN DELIVERY INCLUDED
- MOUNTING LIKE USUAL HOLLOW SPACE BOX VIA 4 SCREWS
- LOUDSPEAKER BAFFLE MOUNTED THROUGH 2 SCREWS
- VERY FAST MOUNTING THROUGH QUICK
- SNAP FRONT GRILL

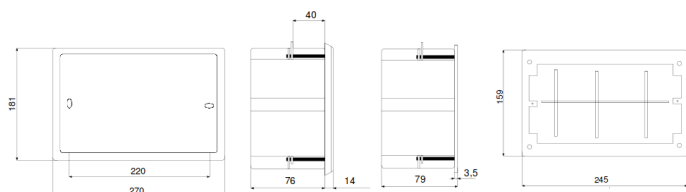

- HIGHLY STABLE ABS CABINET OF VERY LOW FLAMMABILITY
- 50 Hz STABLE 100 V TRANSFORMER POWER
- SAVING THROUGH HIGH SOUND PRESSURE LEVEL
- VOLUME CONTROL & 24 V RELAY, ASSEMBLING OBTAINABLE ON DEMAND
- 2 WAY VERSIONS AVAILABLE

Specifications	DEEN627T-W	DEEN1027T-W
Nominal output	12 W	12 W
W available	100 V - 6 / 3 / 1.5 W	100 V - 10 / 5 / 2.5 W
Bandwidth	70 - 17000 Hz	70 - 17000 Hz
SPL 1W/1m	94 dB	94 dB
SPL max W/1m	102 dB	104 dB
Radiation	180° (1 kHz)	180° (1 kHz)
Material	ABS	ABS
Environment	Inside	Inside
Dimensions mm	270 x 181 x 79	270 x 181 x 79
Weight kg	1.3	1.4
Colour	White	White



ARCHEAN TECHNOLOGIES



1899 avenue d'Italie - 82000 MONTAUBAN FRANCE
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

DEEN655T-B & DEEN670T-B & DEEN680T-B

6 W 100 V black speaker

1 year warranty

- DUST PROTECTION & FOAM RUBBER ANTIVIBRATION STRIPES STANDARD
- 50 Hz STABLE 100 V TRANSFORMER
- TOUCH PROTECTED QUICK CONNECTING CLAMP
- ADDITIONAL MOUNTING DEVICE & STRAIN RELIEF AVAILABLE
- OUTSTANDING LOUDSPEAKER QUALITY FOR MUSIC / SPEECH
- POWER SAVING THROUGH HIGH SOUND PRESSURE LEVEL

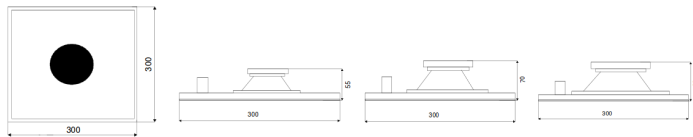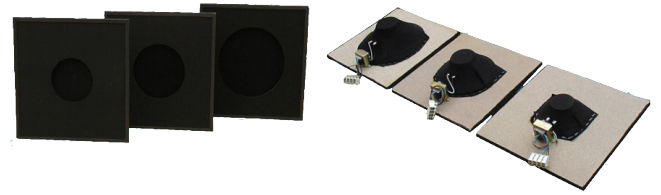

DEEN655T-B

DEEN670T-B

DEEN680T-B

- LOW COST VERSION WITHOUT DUST COVER OBTAINABLE
- CUSTOM COLOUR & CUSTOM SIZE VERSIONS AVAILABLE
- 2 WAY & 10 / 20 / 30 W & 8 OHMS VERSIONS OBTAINABLE
- FIRE RESISTANT & WEATHER PROOF VERSIONS AVAILABLE

Specifications	DEEN655T-B	DEEN670T-B	DEEN680T-B
Nominal output	6 W / 120mm broadband	10/15 W broadband with HF dome	10/15 W broadband with HF dome
W available	1.5 / 3 / 6 W 100V	1.5 / 3 / 6 W 100V	1.5 / 3 / 6 W 100V
Bandwidth	80 - 15000 Hz	70 - 18000 Hz	70 - 19000 Hz
SPL 1W/1m // SPL 1W/1m max	94 dB // 104 dB (3.5 kHz)	95 dB // 106 dB (3.2 kHz)	98 dB // 105 dB (3.8 kHz)
SPL 6W/1m	102 dB // 112 dB (3.5 kHz)	103 dB // 114 dB (3.2 kHz)	106 dB // 113 dB (3.8 kHz)
Radiation	180° (1.8 kHz)	180° (1,5 kHz)	180° (1,4 kHz)
Material	Wood	Wood	Wood
Environment	Inside	Inside	Inside
Dimensions mm	300 x 300 x 55	300 x 300 x 70	300 x 300 x 80
Weight kg	1	1.2	1.3
Colour	RAL 9005	RAL 9005	RAL 9005



ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

DEEN2008-B / DEEN25010-B / DEEN30012-B / DEEN50015-B


PA speaker 200 W / 250 W / 300 W / 500 W 8 Ohm option 100 V

1 year warranty

- BALL ATTACK CERTIFICATION ACCORDING TO DIN 18032/3 FOR WALLS AND CEILINGS
- HIGH SPL LEVEL 102DB 1W/1M PEAK (4KHZ/6KHZ-12")
- SCRATCH RESISTANT BASS-REFLEX PLASTIC ENCLOSURE
- BUILT IN STAND FLANGE
- SIDE INTEGRATED CARRY HANDLE



DEEN2008 = 400
DEEN25010 = 500
DEEN30012 = 585
DEEN50015 = 685



DEEN2008 = 280
DEEN25010 = 355
DEEN30012 = 420
DEEN50015 = 440

DEEN2008 = 250
DEEN25010 = 260
DEEN30012 = 305
DEEN50015 = 350

OPTIONS AVAILABLE :

- 100 V HIGH END RING CODE TRANSFORMER OR STANDARD TRANSFORMER
- HEIGHT ADJUSTABLE OF SPEAKER STAND (FOR 10"/12"/15")
- WALL MOUNTING BRACKET WITH OPTIONAL STABILIZATION BRACKET (FOR 10"/12"/15")

Specifications	DEEN2008-B	DEEN25010-B	DEEN30012-B	DEEN50015-B
Rated power	200 W	250	300 W	500 W
Power available	200 W 8 Ohm Option 100 V : 200 / 150 / 100 W or 100 / 75 / 50 W	250 W 8 Ohm Option 100 V : 200 / 150 / 100 W or 100 / 75 / 50 W	300 W 8 Ohm Option 100 V : 200 / 150 / 100 W or 100 / 75 / 50 W	500 W 8 Ohm Option 100 V : 200 / 150 / 100 W or 100 / 75 / 50 W
Frequency range	65 - 20000 Hz	50 - 20000 Hz	45 - 20000 Hz	35 - 20000 Hz
SPL 1W/1m	96 dB	96 dB	98 dB / 102 dB pic	99 dB
SPL n W/1m	119 dB	120 dB	123 dB / 127 dB pic	124 dB
Radiation	-	-	-	-
Material	ABS	ABS	ABS	ABS
Environnement	Inside	Inside	Inside	Inside
Dimensions mm	400 x 280 x 250 - 8"	500 x 355 x 260 - 10"	585 x 420 x 305 - 12"	685 x 440 x 350 - 15"
Weight kg	7	13	19	24
Colour	Black	Black	Black	Black



ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

DEEN3027T-W & DEEN4033T-W & DEEN6040T-W


30&60 W / 40&80 W / 60&120 W 100 V white cabinet

1 year warranty

- HIGHLY STABLE MDF CABINET
- SCRATCH-RESISTANT PAINT-FINISH
- SELECTED LOUDSPEAKER QUALITY FOR HIGH END MUSIC PERFORMANCE
- TOUCH-PROTECTED 100-V-CONNECTORS



DEEN3027T-W = 275
DEEN4033T-W = 334
DEEN6040T-W = 402



DEEN3027T-W = 184
DEEN4033T-W = 230
DEEN6040T-W = 276

DEEN3027T-W = 182
DEEN4033T-W = 228
DEEN6040T-W = 274

Schémas à titre informatif, dimensions en mm

- IMPEDANCE-CHANGE THROUGH REAR-PANEL-ROTARY-SWITCH
- 8-OHM-IMPEDANCE AVAILABLE
- MOUNTING-BRACKET AVAILABLE

Specifications	DEEN3027T-W	DEEN4033T-W	DEEN6040T-W
Nominal output	30 / 60 W	40 / 80 W	60 / 120 W
W available	30 / 60 W 8 Ohm Option 100 V : 30 / 15 / 7.5 / 3.75 W	40 / 80 W 8 Ohm Option 100 V : 40 / 20 / 10 / 5 W	60 / 120 W 8 Ohm Option 100 V : 60 / 30 / 15 / 7.5 W
Bandwidth	85 - 20000 Hz	50 - 20000 Hz	40 - 20000 Hz
SPL 1W/1m	90 dB	90 dB	91 dB
SPL max W/1m	103 dB	104 dB	107 dB
Radiation	-	-	-
Material	MDF	MDF	MDF
Environment	Inside	Inside	Inside
Dimensions mm	275 x 182 x 184	334 x 228 x 230	402 x 274 x 276
Weight kg	3	5	7.8
Colour	White	White	White



ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

DEEN20010-B & DEEN20012-B & DEEN20015-B


200 W / 250 W / 300 W / 500 W 8 Ohm black cabinet

1 year warranty

- SCRATCH RESISTANT BASS REFLEX PLASTIC ENCLOSURE
- HIGH CLASS COMPONENTS FOR MUSIC PERFORMANCE
- BUILT IN STAND FLANGE
- SIDE INTEGRATED CARRY HANDLE



DEEN20010 = 510
DEEN20012 = 580
DEEN20015 = 690



DEEN20010 = 280
DEEN20012 = 330
DEEN20015 = 410

DEEN20010 = 341
DEEN20012 = 410
DEEN20015 = 470

- OPTIONAL AVAILABLE:
- 100V
- HIGH END RING CORE TRANSFORMER OR STANDARD TRANSFORMER
- HEIGHT ADJUSTABLE SPEAKER STAND
- WALL MOUNTING BRACKET WITH OPTIONAL STABILIZATION BRACKET

Specifications	DEEN20010-B	DEEN20012-B	DEEN20015-B
Nominal output	200 W	300	300 W
W available	200 W 8 Ohm Option 100 V : 200 / 150 / 100 W or 100 / 75 / 50 W	300 W 8 Ohm Option 100 V : 200 / 150 / 100 W or 100 / 75 / 50 W	300 W 8 Ohm Option 100 V : 200 / 150 / 100 W or 100 / 75 / 50 W
Bandwidth	55 - 20000 Hz	50 - 20000 Hz	40 - 20000 Hz
SPL 1W/1m	94 dB	96 dB	96 dB / 102 dB pic
SPL max W/1m	117 dB	121 dB	121 dB / 127 dB pic
Material	ABS	ABS	ABS
Environment	Inside	Inside	Inside
Dimensions mm	510 x 341 x 280	580 x 410 x 330	690 x 470 x 410
Weight kg	11	16	22
Colour	Black	Black	Black