



## ARCHEAN TECHNOLOGIES

1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPL610T-W



6W 100V white/black/gold/silver colour ceiling loudspeaker

1 year warranty

- FIRE-RESISTANT/PROTECTED CABINET
- AGELESS FORM-STABLE
- QUICK MOUNTING THROUGH 2 FAST-SPRINGS
- 50-HZ-STABLE 100-V-TRANSFORMER
- TOUCH-PROTECTED 100-V-CONNECTING-CLAMP
- FOUR COLOURS STANDARD



- INTELLIGENT LOUDSPEAKER-QUALITY
- SPECIAL-COLOURS IN CUSTOM-MADE-VERSIONS AVAILABLE ON DEMAND



Specifications	DEPL610T-W/-B/-S/-G
Rated power	6 W
Power available	100 V - 6 / 4 / 2 W
Frequency response	100 - 20000 Hz
SPL 1W/1m	89 dB
SPL XW/1m	97 dB
Coverage	-
Material	metal
Environment	inside
Dimensions mm	105 x 72
Cut out mm	85
Weight kg	0.5
Colour	White, black, gold, silver



## ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPL611T/620T-W

6W 100V white ceiling loudspeaker

1 year warranty

- FIRE RESISTANT PROTECTED CABINET
- AGELESS FORM STABLE
- EASY MOUNTING THROUGH FAST SPRING BAYONET SYSTEM
- 50 HZ STABLE 100 V TRANSFORMER
- TOUCH PROTECTED 100 V QUICK CONNECTING CLAMP
- OUTSTANDING LOUDSPEAKER QUALITY

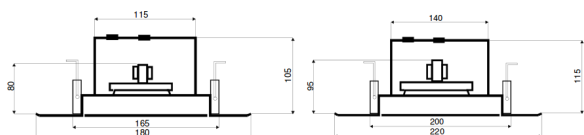

- POWER SAVING THROUGH HIGH SOUND PRESSURE LEVEL
- OPTIONAL FIREDOME & IN WALL CONCRETE DOME AVAILABLE

Specifications	DEPL611T-W	DEPL620T-W
Rated power	6 W	10/15 W
Power available	100 V - 6 / 3 / 1.5 W	100 V - 6 / 3 / 1.5 W
Frequency range	80 - 15000 Hz	70 - 18000 Hz
SPL 1W/1m	104 dB (3.5 kHz)	106 dB (3.2 kHz)
SPL max W/1m	112 dB (3.5 kHz)	114 dB (3.2 kHz)
Radiation	180° (1.8 kHz)	180° (1.5 kHz)
Material	Metal	Metal
Environnement	Inside	Inside
Dimensions mm	180 x 80	220 x 98
Cut-out mm	165	200
Weigth kg	1	1.4
Colour	White	White



## ARCHEAN TECHNOLOGIES

1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
 Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPL613T-W


6W 100V ceiling speaker

1 year warranty

- FIRE RESISTANT/PROTECTED CABINET
- FULL METAL CABINET
- AGELESS FORM STABLE
- ARCHITECTURAL ATTRACTIVE SPEAKER SIZE
- QUICK MOUNTING THROUGH 2 FAST SPRINGS



- TOUCH PROTECTED 100V CONNECTING CLAMP
- INTELLIGENT MUSIC PERFORMANCE
- HIGH SPEECH INTELLIGIBILITY

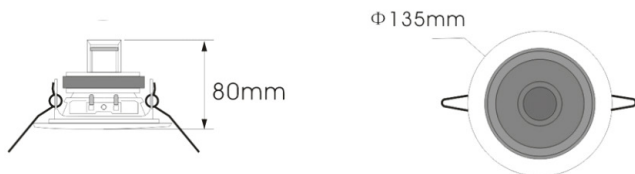

Specifications	DEPL613T-W
Nominal output	6 W
W available	100 V - 6 / 3 W
Bandwidth	85 - 18000 Hz
SPL 1W/1m	92 dB
SPL 6W/1m	100 dB
Radiation	-
Material	Metal enclosure
Environment	Inside
Dimensions mm	135 x 80
Cut out	109-112
Weight kg	0.5
Colour	white



## ARCHEAN TECHNOLOGIES



1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPL616T/622T/624T-W

6W 100V white ceiling loudspeaker

1 year warranty

- FIRE RESISTANT/PROTECTED CABINET
- EASY MOUNTING THROUGH FAST SPRING/BAYONET SYSTEM
- 50 HZ STABLE 100 V TRANSFORMER
- TOUCH PROTECTED 100 V QUICK CONNECTING CLAMP
- BALL ATTACK LOCKING DEVICE & DUST PROTECTION AVAILABLE ON DEMAND
- POWER SAVING MODE THROUGH HIGH SOUND PRESSURE LEVEL

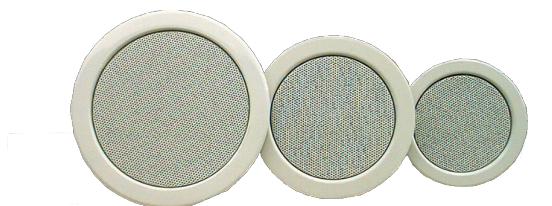

- OPTIONAL FIREDOME & IN WALL/CONCRETE DOME AVAILABLE
- SPECIAL COLOUR & CHROME PLATED VERSIONS AVAILABLE ON DEMAND
- 2 WAY & 10/20/30 W & 8 OHMS VERSIONS AVAILABLE
- WEATHER PROOFED/TROPICALIZED & DAMP ROOM VERSION AVAILABLE ON DEMAND

Specifications	DEPL616T-W	DEPL622T-W	DEPL624T-W
Rated power	6 W	10/15 W	10/15 W
Power available	100 V - 6 / 3 / 1.5 W	100 V - 6 / 3 / 1.5 W	100 V - 6 / 3 / 1.5 W
Frequency response	80 - 15000 Hz	70 - 18000 Hz	70 - 19000 Hz
SPL 1W/1m	104 dB (3.5 kHz)	106 dB (3.2 kHz)	105 dB (3.8 kHz)
SPL max W/1m	112 dB (3.5 kHz)	114 dB (3.2 kHz)	113 dB (3.8 kHz)
Coverage	180° (1.8 kHz)	180° (1.5 kHz)	180° (1.4 kHz)
Material	Métal	Métal	Métal
Environment	Intérieur	Intérieur	Intérieur
Dimensions mm	180 x 80	220 x 98	265 x 105
Cut out mm	165	200	240
Weight kg	1	1.4	1.5
Colour	RAL 9010	RAL 9010	RAL 9010



## ARCHEAN TECHNOLOGIES



1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
 Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPL617T-W & DEPL617TC-W

6W 100V white ceiling speakers

1 year warranty

- FIRE RESISTANT/PROTECTED CABINET
- AGELESS FORM STABLE
- EXTREME QUICK MOUNTING THROUGH FAST SPRING SYSTEM
- SMOOTH DEMOUNTING OF FRAGILE CEILINGS
- 50 Hz STABLE 100V TRANSFORMER

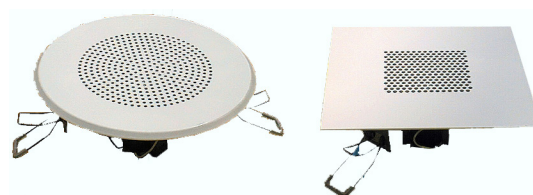

- TOUCH PROTECTED 100V QUICK CONNECTING CLAMP

SpEcifications	DEPL617T-W	DEPL617TC-W
Nominal output	6 W	6 W
W available	100 V - 6 / 3 / 1.5 W	100 V - 6 / 3 / 1.5 W
Bandwidth	80 - 15000 Hz	80 - 15000 Hz
SPL 1W/1m	92 dB	92 dB
SPL 6W/1m	100 dB	100 dB
Material	Metal	Metal
Environment	Inside	inside
Dimensions mm	170 x 170 x 75	170 x 170 x 75
Cutout mm	144	144
Weight kg	1	1.3
Colour	RAL 9010	RAL 9010



## ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPL618T-W & DEPL619T-W

Ceiling loudspeaker, 6W 100V white

1 year warranty

- HIGH SPL-LEVEL THROUGHOUT ALL SPEECH FREQUENCIES
- 95DB 1W/1M / 99DB PEAK (2KHZ/6,5")
- RADIATION 180° (6,5"/100HZ-1,7KHZ)
- QUICK MOUNTING THROUGH TWO FATS INSTALLATION SPRINGS

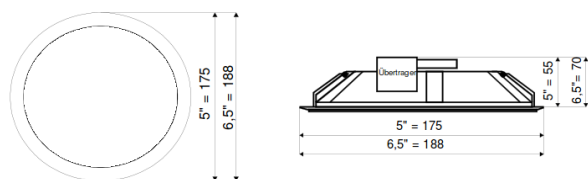

- TOUCH PROTECTED 100-V-CONNECTING CLAMP
- HIGHLY STABLE ABS MOUNTING RING / LOW FLAMMABILITY
- POWDER COATED METAL FRONT GRILL
- MINIMUM MOUNTING DEPTH (55/70-MM)

Specifications	DEPL618T-W	DEPL619T-C-W
Rated power	6 / 10 W	10 / 15 W
Power available	100 V - 6 / 3 W	100 V - 6 / 3 W
Frequency range	80 - 16000 Hz	70 - 19000 Hz
SPL 1W/1m	94 dB	95 dB / 99 dB - 2 kHz
SPL 6W/1m	102 dB	103 dB / 107 dB - 2 kHz
Radiation	180° (1.5 kHz)	180° (1.7 kHz)
Material	ABS	ABS
Environnement	Inside	Inside
Dimensions mm	175 x 55	188 x 70
Cut-out mm	148	168
Weight kg	0.5	0.7
Colour	White	White





## ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPL625T-W & DEPL625TM-W

6W 100V ABS-metal/Full metal white ceiling speaker

1 year warranty

- UL 94 ABS/METAL VERSION: DEPL625T-W
- FULL METAL VERSION: DEPL625TM-W
- OPTIONAL FIREDOME AVAILABLE
- EASY MOUNTING THROUGH CATCH SPRING/BAYONET SYSTEM

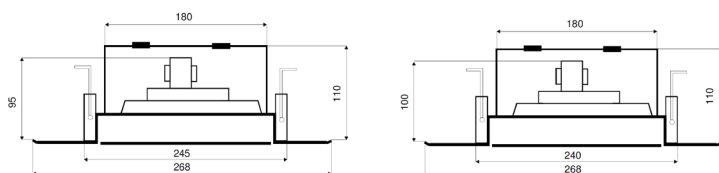

- 50Hz STABLE TRANSFORMER
- TOUCH PROTECTED 100 V QUICK CONNECTING CLAMP
- OPTIONAL CERAMIC CLAMP & THERMO FUSE AVAILABLE

Specifications	DEPL625T-W	DEPL625TM-W
Nominal output	10 / 15 W	10/15 W
W available	100 V - 6 / 3 / 1.5 W	100 V - 6 / 3 / 1.5 W
Bandwidth	70 - 19000 Hz	70 - 19000 Hz
SPL 1W/1m	96 dB	96 dB
SPL 6W/1m	104 dB	104 dB
Material	ABS & metal grill	metal
Environment	Inside	Inside
Dimensions mm	268 x 95 (110 with fire dome)	268 x 100 (110 with fire dome)
Cutout mm	245	240
Weight kg	1.25 (1.65 with fire dome)	1.4 (1.8 with fire dome)
Colour	RAL 9010	RAL 9010



## ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPL1016T/1022T/1024T-W

10W 100V white ceiling loudspeaker

1 year warranty

- EASY MOUNTING THROUGH FAST SPRING/BAYONET SYSTEM
- 50 HZ STABLE 100 V TRANSFORMER
- TOUCH PROTECTED 100 V QUICK CONNECTING CLAMP
- OUTSTANDING LOUDSPEAKER QUALITY
- POWER SAVING MODE THROUGH HIGH SOUND PRESSURE LEVEL



- OPTIONAL FIREDOME & IN WALL/CONCRETE DOME AVAILABLE
- SPECIAL COLOUR & CHROME PLATED VERSIONS AVAILABLE ON DEMAND
- 2 WAY & 10/20/30/W & 8OHMS VERSIONS AVAILABLE
- WEATHER PROOFED/TROPICALIZED & DAMP ROOM VERSION AVAILABLE ON DEMAND

Specifications	DEPL1016T-W	DEPL1022T-W	DEPL1024T-W
Rated power	10 W	10/15 W	10/15 W
Power available	100 V - 10 / 5 / 2.5 W	100 V - 10 / 5 / 2.5 W	100 V - 10 / 5 / 2.5 W
Frequency response	70 - 17000 Hz	70 - 18000 Hz	70 - 19000 Hz
SPL 1W/1m	95 dB (3.5 kHz)	106 dB (3.2 kHz)	105 dB (3.8 kHz)
SPL max W/1m	105 dB (3.5 kHz)	106 dB (3.2 kHz)	105 dB (3.8 kHz)
Coverage	180° (1.2 kHz)	180° (1.5 kHz)	180° (1.4 kHz)
Material	Metal	Metal	Metal
Environment	Inside	Inside	Inside
Dimensions mm	180 x 98	220 x 100	265 x 105
Cut out mm	165	200	240
Weight kg	1.4	1.5	1.6
Colour	RAL 9010	RAL 9010	RAL 9010





## ARCHEAN TECHNOLOGIES



1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPL1020T-W & DEPL3020T-W

2 ways 30 & 10W 100V white ceiling speakers

1 year warranty

- HIGH SPL 2 WAY LOUDSPEAKER SYSTEM FOR ADVANCED APPLICATIONS
- FIRE RESISTANT/PROTECTED CABINET
- EASY MOUNTING THROUGH FAST SPRING/BAYONET SYSTEM
- 50 Hz STABLE 100V TRANSFORMER
- TOUCH PROTECTED 100V QUICK CONNECTING CLAMP
- OPTIONAL CERAMIC CONNECTING CLAMP & THERMO FUSE

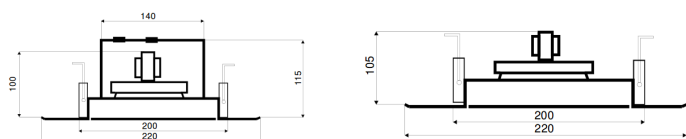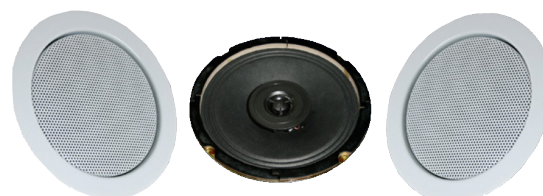

### AVAILABLE IN OPTION

- POWER SAVING THROUGH HIGH SOUND PRESSURE LEVEL
- OPTIONAL FIRE DOME AVAILABLE
- BALL PROOF VERSION ACCORDING TO DIN 18032/III AVAILABLE

Specifications	DEPL1020T-W	DEPL3020T-W
Nominal output	10 / 15 W 2 ways	30 W 2 ways
W available	100 V - 10 / 5 / 2.5 W	100 V - 30 / 20 / 10 / 6 / 3 W
Bandwidth	70 - 20000 Hz	70 - 20000 Hz
SPL 1W/1m	96 dB	97 dB
SPL 6W/1m	106 dB	111.5 dB
Material	Metal	Metal
Environment	inside	inside
Dimensions mm	220 x 100	220 x 105
Cutout mm	200	200
Weight kg	1.3	1.7
Colour	White	White



## ARCHEAN TECHNOLOGIES



1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPL3016T-W & DEPL6020T-W

30W & 60W 100V white ceiling speaker

1 year warranty

- HIGH CLASS MUSIC PERFORMANCE
- SUITABLE FOR BARS, RESTAURANTS, LOUNGES
- HIGH END CO AXIAL SYSTEM WITH HF HORN
- PORTED ENCLOSURE FOR EXTENDED BASS RESPONSE
- 100 V TAPPINGS WITH ROTARY POWER SELECTOR



- METAL BASS REFLEX ENCLOSURE AND FRONT GRILL
- HIGHLY STABLE ABS MOUNTING RING / LOW FLAMMABILITY
- CONNECTING TERMINAL

Specifications	DEPL3016T-W	DEPL6020T-W
Rated power	30 W	60 W
Power available	100 V 30 / 20 / 10 / 5 W	100 V 60 / 30 / 15 / 7.5 W
Frequency range	80 - 20000 Hz	60 - 20000 Hz
SPL 1W/1m	89 dB	89
SPL n W/1m	103 dB	106
Radiation	-	-
Material	ABS	ABS
Environnement	Inside	Inside
Dimensions mm	203 x 170	250 x 194
Cut-out mm	165	220
Weight kg	1.5	3.1
Colour	White	White



## ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPL3050T-B & DEPL10050T-B

30W & 50W 100V ceiling speakers

1 year warranty

- CEILING SPEAKER FOR CRITICAL ACOUSTICAL ENVIRONMENT
- OPTIMIZED FOR LONG REVERBATION ROOMS & FACILITIES
- PREDESTINATED FOR HIGH CEILINGS & HIGH INTERFERENCE LEVELS
- CONICAL HORN WITH 90° x 90° RADIATION
- 12" DUPLEX LOUDSPEAKER SYSTEM

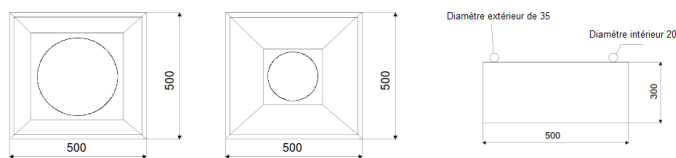

- 8" HIGH SPL SYSTEM
- BUNCHING DIRECTIVITY IN THE LOW/MIDDLE FREQUENCIES
- POWER SAVING THROUGH HIGH SOUND PRESSURE LEVEL
- CUSTOM COLOUR OBTAINABLE
- SUSPENSION VIA 4 x M6 MOUNTING RING EYELETS

Specifications	DEPL3050T-B	DEPL10050T-B
Nominal output	30 W	125 W
W available	30 / 15 / 7.5 W 100 V	100 / 50 / 25 W 100 V
Bandwidth	50 - 20000 Hz	50 - 19000 Hz
SPL 1W/1m	100 dB	100 dB
SPL 6W/1m	115 dB / 117.5 dB max (4 kHz)	120 dB
Radiation	500 Hz : 100° x 100° / 1kHz : 90° x 90° / 2 kHz : 85° x 86°	500 Hz : 106° x 106° / 1kHz : 120° x 120° / 2 kHz : 90° x 90°
Material	MDF	MDF
Environment	Inside	Inside
Dimensions mm	500 x 500 x 300	300 x 300 x 70
Weight kg	19	23
Colour	Black	Black