



ARCHEAN TECHNOLOGIES

1899 avenue d'Italie - 82000 MONTAUBAN FRANCE

Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

ATVOIP422MIL2

Monitoring module

VoIP

MADE IN 

2 years warranty


- The ATMIL2 monitoring card can be mounted into ATVOIP422 module to create ATVOIP422MIL2. This product is designed to work with ATCONTR2 server and network controller.

Front view



24 V

Ethernet

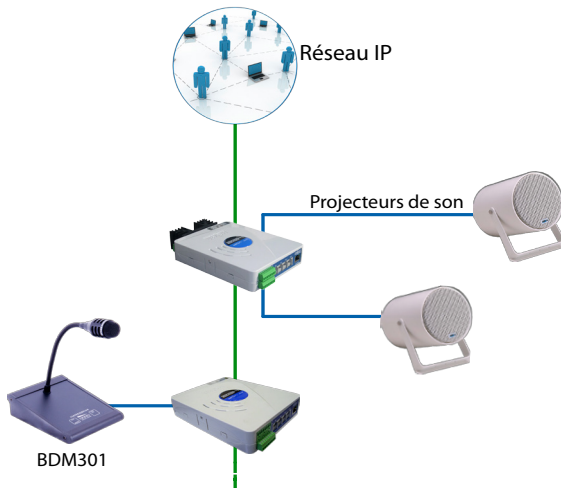

- This product monitors 2 amplifiers and 2 x 100 V audio lines thank to impedance measurement.
- When a default is detected, a command is automatically sent to the supervision and management system in order to generate an alarm and inform the user.

Specifications	ATMIL2
Min power supply	19 V
Nominale power supply	24 < 10 mA
Max power supply	36 V
Signal measurement bandwidth	1 kHz ou 18 kHz
Signal measurement level	min -45 dBm max -10 dBm
Connectors Audio output to amplifiers	prise RJ45
Output level	0 dBm symétrique
Output impedance	< 600 ohms
Min power of monitored amplifiers	10 W
Max power of monitored amplifiers	500 W
Connector	Clamp Screw terminal blocks for 2.5 mm ² max

Rear view

