

digital innovation



ARCHEAN TECHNOLOGIES 1899 avenue d'Italie - 82000 MONTAUBAN FRANCE Tel : + 33 (0) 5 63 93 50 00

DTA4

Toilet Alarm controller

- The 4-way toilet alarm control panel (the DTA4) is the latest addition to our DTAKIT range of products.
- Simply connect the new panel to up to four toilet alarm kits for an easy to operate toilet alarm system.
- A stylish product with a full range of functions, including fault monitoring. Fully BS8300 compliant.
- CONTROL PANEL:
- Simply connect to up to four toilet alarm kits (see right) for a fully compliant and monitored disabled toilet alarm system.
- Panels can be daisy-chained to add more toilet alarm kits from one mains connection.
- Each toilet alarm point is clearly indicated on the panel, with space for the user to add individual zone labelling.
- The panel has four 'call acknowledge' buttons and incoming call LEDs one for each toilet alarm connected.

DTAKIT PRODUCTS & CODES:		
	White	Stainless Steel
Panneau de contrôle 4 voies		
Control panel	DTA4	DTA4S
Kit Alarme Toilette		
3 part kit	DTAKIT	DTASKIT
Ceiling pull	DTACP	DTASCP
Over-door light	DTAODL	DTASODL
Reset point	DTARP	DTASRP
WC door sign labe	DTALAB	DTALAB
Assistance Call		
Call button	DTACB	DTASCB
Call button + reset button	DTACBRP	DTASCBRP
Wall mount pull cord	DTACPW	DTASCPW
Call button + 6.35mm jack	DTACBJ	DTASCBJ
IP65 Rated		
Pull cord	DTACPM	
Call button	DTACBM	
Reset button	DTARPM	
Call & reset point	DTACBRPM	




- When the relevant 'call acknowledge' button is pressed on the panel, the caller will notice audible and visual changes to the alarm indicators, thus providing reassurance that help is on the way.
- In addition, the system has a programmable alarm 're-sound' feature. This will operate if a call has been acknowledged at the control unit, but is not reset at the point of call within the specified time.
- A separate relay output enables connection to an external beacon allowing the opportunity to add a remote indicator to alert staff in a different area.
- The unit has a built-in mains power supply and an LED to confirm that the system is powered and available for use.
- The system is monitored and will indicate a short or open circuit condition. The display will also show which toilet alarm is at fault.
- As with all our toilet alarm products, the control unit is available with a white or stainless steel finish.
- For ease of installation, the panel fits into a standard double gang back box (not supplied).
- Compatible with all DTAKIT assistance call options, including the IP65 rated products.


Photos et informations non contractuelles

1

DTA4 Toilet Alarm controller

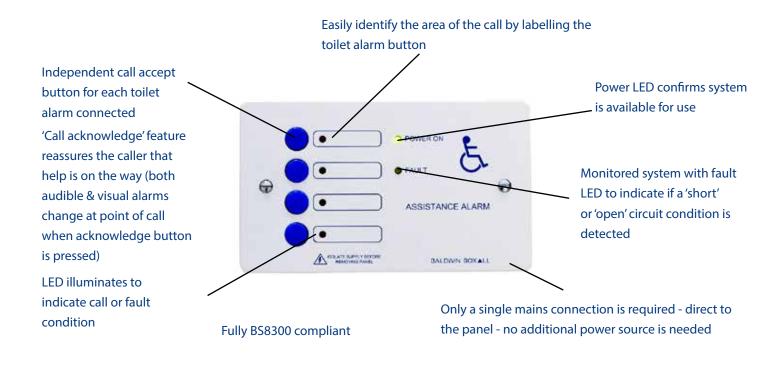

Panel dimensions: 146 mm (W) x 86 mm (H). (Requires a 35 mm double gang back box)

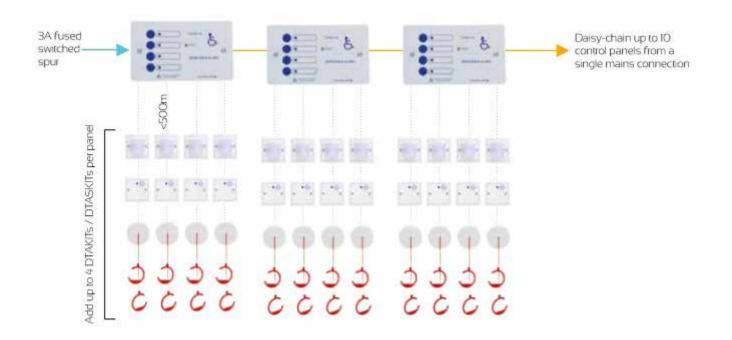

Please note: Stainless steel products are not intended for use in humid areas.

Photos et informations non contractuelles