



## ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

# DEPR614TI-W & DEPR617TI & DEPR621TI-W


6 W 100 V outside soundprojector

1 year warranty

- FIRE RESISTANT/PROTECTED & WEATHER PROOFED
- AGELESS FORM STABLE
- EXCLUSIVE USE OF STAINLESS STEEL/ALUMINIUM COMPONENTS
- ADDITIONAL RAIN PROTECTION THROUGH CUSTOM RAIN ROOF
- 50 Hz STABLE 100V TRANSFORMER
- OUTSTANDING LOUDSPEAKER QUALITY
- POWER SAVING THROUGH HIGH SOUND PRESSURE LEVEL
- SPECIAL COLOUR & CHROME PLATED VERSIONS AVAILABLE

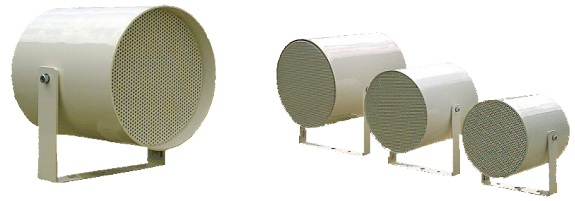

- CUSTOM SIZE & PENDULAR VERSIONS OBTAINABLE
- 2 WAY & ALTEC VERSIONS AVAILABLE

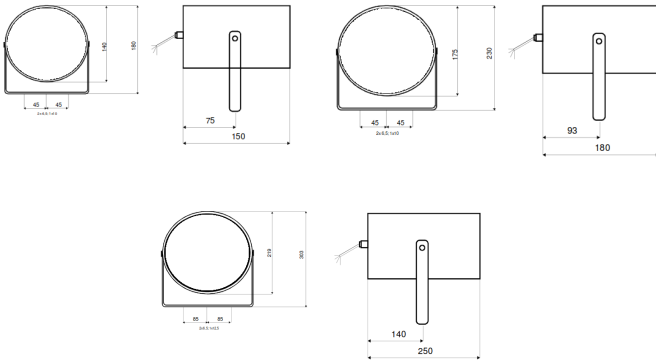

Specifications	DEPR614TI-W	DEPR617TI-W	DEPR621TI-W
Output power	6 W	10 / 15 W	10/15 W
W available	6 / 3 / 1.5 W 100 V or 30 / 20 / 10 W 2 ways in option	6 / 3 / 1.5 W 100 V or 30 / 20 / 10 W 2 ways in option	6 / 3 / 1.5 W 100 V or 30 / 20 / 10 W 2 ways in option ALTEC
Bandwidth	80 - 15000 Hz	70 - 18000 Hz	70 - 19000 Hz
SPL 1W/1m	94 dB	95 dB	98 dB
SPL 6 W/1m	102 dB	103 dB	106 dB
SPL 1 W/1m max	104 dB (3.5 kHz)	106 dB (3.2 kHz)	105 dB (3.8 kHz)
SPL 30/50 W/1m max	112 dB (3.5 kHz)	114 dB (3.2 kHz)	113 dB (3.8 kHz)
Radiation	180° (1.4 kHz)	180° (0.9 kHz) 160° (1 kHz)	180° (1 kHz)
Material	Alu	Alu	Alu
Environment	Inside & outside	Inside & outside	Inside & outside
Dimensions mm	140 x 150	175 x 180	219 x 250
Weight kg	1.3	1.7	1.9
Colour	RAL9010	RAL 9010	RAL 9010



## ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPR2614T-W & DEPR21214T-W


6 W & 12 W 100 V IP55 bi directionnal sound projector

1 year warranty

- FIRE RESISTANT/PROTECTED
- AGELESS FORM STABLE ALUMINIUM CABINET
- 50 Hz STABLE 100V TRANSFORMER
- SPEECH & MUSIC OPTIMIZED LOUDSPEAKER QUALITY
- HUMIDITY PROTECTED
- PROTECTION DEGREE IP55

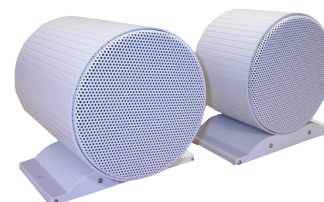

- SIMILAR CUSTOM SIZE & CHROME PLATED VERSIONS AVAILABLE

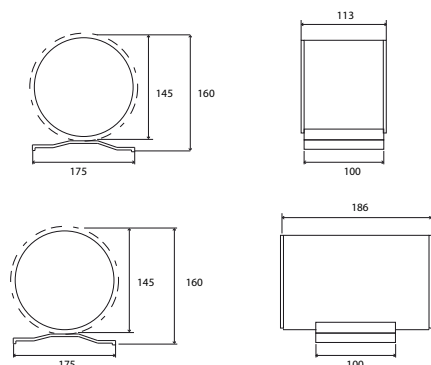

Specifications	DEPR2614T-W	DEPR21214T-W
Nominal output	1 x 15 W / 120mm broadband	2 x 12 W
W available	100 V 6 / 3 / 1.5 W	2 x 100 V 12 / 6 & 12 / 6 / 3 W
Bandwidth	80 - 15000 Hz	70 - 16000 Hz
SPL 1W/1m	95 dB	95 dB x 2
SPL max W/1m	103 dB	103 dB x 2
Radiation	360°	360°
Material	Aluminium	Aluminium
Environment	inside	inside
Dimensions mm	146 x 100	146 x 186
Cutout mm	175	175
Weight kg	1.9	3.2
Colour	White	White



## ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
 Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPR2013T-W & DEPR2013TM-W

20 W 100 V ABS or ALU sound projector

1 year warranty

- HIGH AUDIO QUALITY
- DIRECTIVITY FOR SPEECH APPLICATION
- POWER SAVING THROUGH HIGH SOUND PRESSURE LEVEL
- FIRE RESISTANT / LOW FLAMMABILITY CABINET
- 2 WAYS VERSIONS
- ALU VERSION ACCESSIBLE THROUGH REAR SIDE

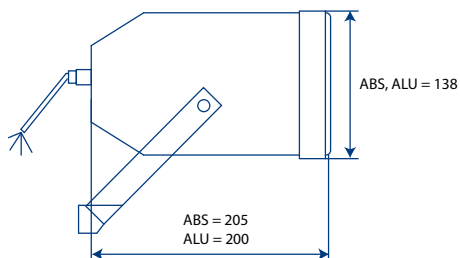

Specifications	DEPR2013T-W	DEPR2013TM-W
Rated power	25 W	25 W
Power available	100 V 20 / 10 / 5 W	100 V 20 / 10 / 5 W
Banwidth	110 - 17000 Hz	110 - 17000 Hz
SPL 1W/1m	95 dB	95 dB
SPL 6W/1m	108 dB	108 dB
Material	ABS	ALU
Environment	Type B - outside	Type B - outside
Dimensions in mm	138 x 205	138 x 200
Weight kg	1.6	2.2
Colour	White	White



## ARCHEAN TECHNOLOGIES



1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
 Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPR3018T-W

30 W 100 V white sound projector

1 year warranty

- WEATHER PROTECTED
- WEATHER RESISTANT ABS CASE
- 100V 30/15/7,5/3,75 W
- ADDITIONAL 70V & 8 OHM
- HIGH QUALITY IN THE TREBLE
- HIGH MUSIC PERFORMANCE
- HIGH SPEECH INTELLIGIBILITY
- INCREASED DIRECTIVITY



Specifications	DEPR3018T-W
Nominal output	30 W
W available	30 / 15 / 7.5 / 3.75 100 V
Bandwidth	100 - 16000 Hz
SPL 1W/1m	96 dB
SPL 6W/1m	111 dB
Material	ABS
Environment	outside
Dimensions mm	180 x 220
Weight kg	900 g
Colour	RAL 7035 light grey



## ARCHEAN TECHNOLOGIES


1899 avenue d'Italie - 82000 MONTAUBAN FRANCE  
Tel : + 33 (0) 5 63 93 50 00 - Fax : + 33 (0) 5 63 03 72 99

## DEPR3021T-W & DEPR3021TE-W

30 W 100 V sound projector

1 year warranty

- FIRE RESISTANT/PROTECTED
- AGELESS FORMSTABLE
- EXCLUSIVE USE OF STAINLESS STEEL/ALUMINIUM COMPONENTS
- ADDITIONAL RAIN PROTECTION THROUGH CUSTOM RAIN ROOF
- 50 Hz STABLE 100 V TRANSFORMER
- OUTSTANDING LOUDSPEAKER QUALITY

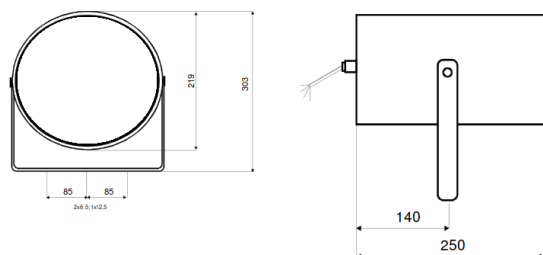

- POWER SAVING THROUGH HIGH SOUND PRESSURE LEVEL
- CUSTOM COLOUR & CHROME PLATED VERSIONS AVAILABLE
- CUSTOM SIZE & PENDULAR VERSIONS OBTAINABLE

Specifications	DEPR3021T-W	DEPR3021TE-W
Nominal output	30 W 2 ways	30 / 60 W
W available	30 / 15 / 7.5 / 3.75 100 V	30 / 15 / 7.5 / 3.75 100 V
Bandwidth	50 - 20000 Hz	60 - 20000 Hz
SPL 1W/1m	98 dB	100 dB
SPL 30 W/1m	113 dB	115 dB
SPL 1 W/1m max	99 dB (4.7 kHz)	102.5 dB (4 kHz)
SPL 30/50 W/1m max	114 dB (4.7 kHz - 30W)	117.5 dB (4 kHz)
Radiation	180° (1.6 kHz)	180° (1 kHz)
Material	Alu	Alu
Environment	Inside	Inside
Dimensions mm	219 x 250	219 x 250
Weight kg	2.9	3.5
Colour	RAL9010	RAL 9010